

Quality is more than a word



Air to Air Thermal Shock Chambers

TSA Series



3 YEAR WARRANTY



A Wide Variety of Fixed Test Area Type Thermal Shock Chambers

For achieving compliance with the ISO 26262 Road vehicles - Functional safety, IEC 61508 Functional Safety of Electrical/Electronic/Programmable Electronic Safety - related Systems rapid temperature change testing is required to increase the reliability of automotive components. TSA series is designed to evaluate reliability of test specimens by rapid change of the air temperatures from hot to cold repeatedly by opening and closing of damper in a single test area.

Thermal Shock Chambers P.3~P.20

3 YEAR WARRANTY



+ 300°C Specification P.6

3 YEAR WARRANTY

Thermal Shock Chamber with Humidity P.21

P.21



Large Capacity Thermal Shock Chambers



Test area capacity

40L

70L

110L

200L

300L

600L

1000L


3000L

12000L


Features

Compliant with IEC 60068-2-14 Na and MIL-STD-883L standard tests

● Two-zone test

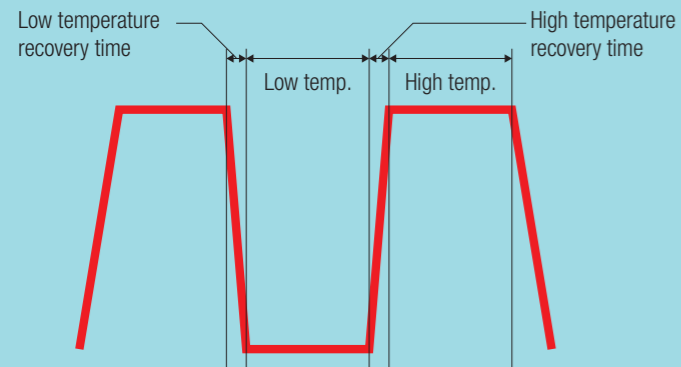


● Three-zone test

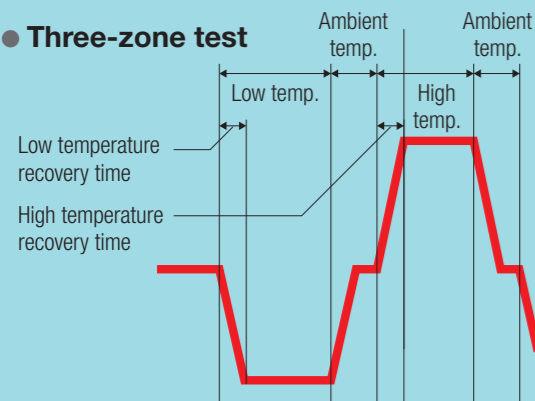

● Temperature uniformity

TSA-203ES-W measurement example

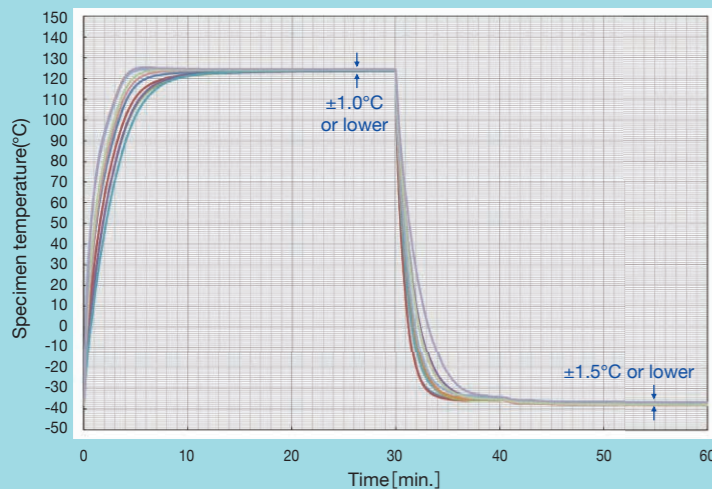


Test conditions
 High-temp. exposure: +125°C, 30 min. Specimen: Printed circuit boards
 Pre-heating temperature: +145°C Measuring points: 10
 Low-temp. exposure: -40°C, 30 min.
 Pre-cooling temperature: -55°C

● 2-zone and 3-zone switching by dampers

The TSA series evaluates the reliability of samples by applying short-term alternating stresses of high and low temperatures to them in compliance with standard tests.



◀ How it works

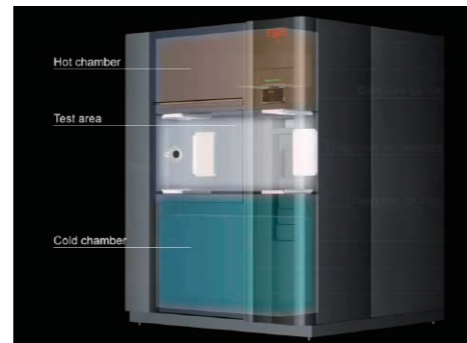

● Thermal shock without moving test specimens

You can get accurate test results without any mechanical impact on test specimens because a test area does not move. Fixed test area type can save testing time because transfer time of the specimen from one chamber to the other is not necessary, also suitable for testing large size, heavy specimens and/or testing many small devices at one time.

● Quick temperature recovery and uniform temperature distribution

Adjust the wind volume, wind speed, and wind direction from the blower using a wind direction board to effectively and uniformly distribute the air in the test area. It is possible to conduct more accurate and reliable tests with less variation in the time it takes for the sample to reach the set temperature under both low-temperature and high-temperature exposure conditions.

Features

1000 cycles continuous operation (option: defrost-free operation)

● Minimizing defrosting burden with defrost-free operation (option: defrost-free operation)

It is possible to run continuously for 500 hours without interrupting the test due to defrosting.


It is possible to conduct 1000 consecutive tests under the 15-minute exposure condition without interruption, and reduce defrosting time and power consumption during cycle testing.

● Automatic setting of pre-cooling and pre-heating in energy-saving, Eco operation mode [Patent JP 5204808]


This feature can further reduce power consumption and remove the inaccuracies and hassles caused by adjustments based on preliminary experiments. Tests operation achieves both energy savings and reproducibility/reliability.

● Parallel refrigerator control system for energy-saving control [Patent JP 5487167]

● 1000 cycles test time comparison example

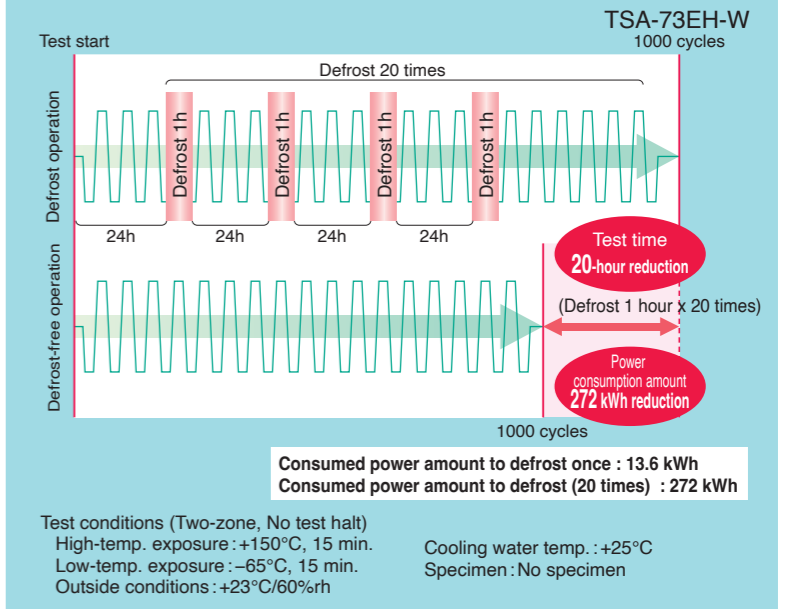

● Temperature changes under Eco operation (example)

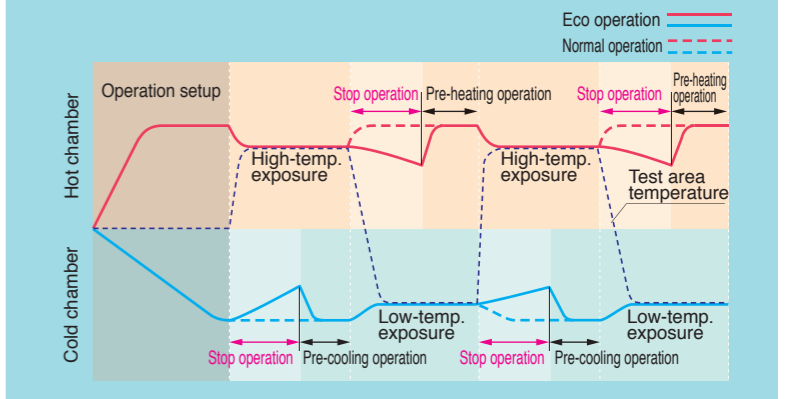

TSA-73EH-W
 Max. 50% reduction in power consumption

*Compared to previous model TSA-71H-W

To minimize our chambers potential environmental impact

R-449A is the best alternative to R-404A

R-449A

LOW GWP REFRIGERANT

All models

64% Reduction

R-404A GWP 3920

R-449A GWP 1397

*R-449A is available on request

Features

You can get accurate test results with fixed test area type that eliminates vibration stress



Product temperature control (example)



Vertically sliding door

Automatic door (option)



Conductor Resistance Evaluation System AMR with TSA

● Easy access to specimens

A standard equipped $\phi 50$ mm cable port is capable of cables with terminal connectors and plugs can be easily connected to specimen. An optional flat cable port is available.



◀ Easy access from the side

● Space-saving sliding door

Equipped with a manual vertical sliding door activated by the unlock button. The sliding door maximizes limited space without being concerned with the door opening and closing space. As an option, the door can be automatically opened/closed at the touch of a button for ease of operations even when carrying specimens.



◀ Video for automatic door

● System integration with ESPEC evaluation system

The ESPEC Conductor Resistance Evaluation System AMR (Sold separately) and TSA series are interlocked as evaluation system.

The system continuously measures the micro resistance in solder joints and the conductive resistance of connectors during thermal cycle test.

● International standards

The TSA series meets the following global safety standards:

- ISO 12100 (Safety of machinery)
 - IEC 60204-1 (Low voltage)
 - IEC 61000-6-2 and EN55011(EMC)
 - RoHS directive
 - Pressure Equipment Directive (PED)*
- *220/400/415V power supply models classified in PED category II

Special Specifications

Please contact us or our local partners for more information.

Easy wiring for measurement and supply power

● Large cable port

Size: W65xH125mm
Easily feed $\phi 50$ connectors and connectors that cannot be fed through flat cable ports.


● Door notch port

The new door notch port allows specimens to be mounted in the test area while connected to power.



Remote cooling modification

Condenser for high temp. chamber changes to remote cooling system which is placed outdoors.

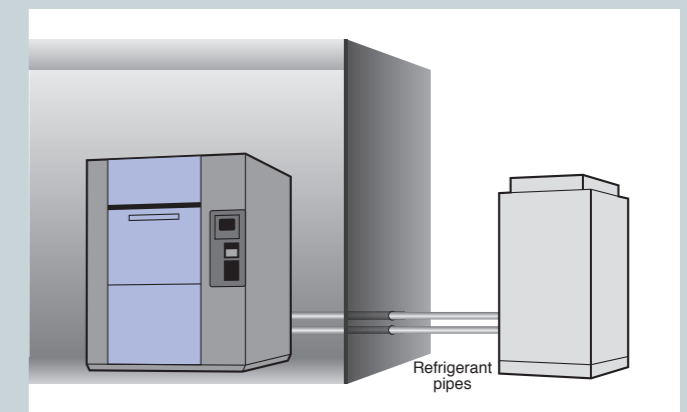

+300°C specification

High-temp. exposure range	+60 to +300°C
Low-temp. exposure range	-70 to 0°C
Temperature recovery performance	Recovery time: Within 20 min. <Recovery Conditions> High-temp. exposure: +250°C/60 min. Low-temp. exposure: -40°C/60 min. Sensor position: Upstream
Test area dimensions (mm)	W650 x H460 x D670



TEST STANDARD AND COMPATIBLE MODELS

Test standard	Exposure temperature			Exposure time		Temperature recovery time	Number of test cycles	Test starting point	Model ^{*1}			
	High temp.	Ambient temp.	Low temp.	High/low temp.	Ambient temp.				EL type	ES type	EH type	
MIL-STD-883L MIL-STD-883-1 (Method No. 1010.9)	A	+85°C +10 0	-	-55°C 0 -10	10 min. or longer	-	Worst case specimen temp. Within 15 min.	Minimum 10	Low temp. or High temp.	-	○	○
	B	+125°C +15 0		-						○	○	
	C	+150°C +15 0		-						-	-	
	D	+200°C +15 0		-65°C 0 -10						-	-	
	E	+300°C +15 0		-						-	-	
	F	+175°C +15 0		-						-	○	
MIL-STD-202-107 (Method No. 107G)	A	+85°C +3 0	+25°C +10 -5	-55°C 0 -3	Differs according to specimen weight	Max 5 min.	Up-stream Within 5 min.	5 cycles 25 cycles 50 cycles 100 cycles	Low temp.	○ ^{*2}	○ ^{*2}	○
	B	+125°C +3 0		-						○ ^{*2}	○	
	C	+200°C +5 0		28 g or lower, 15 min. or 30 min.						-	-	○
	D	+350°C +5 0		28 g to 136 g, 30 min. 136 g to 1.36 kg, 60 min. 1.36 to 13.6 kg, 120 min. 13.6 to 136 kg, 240 min.						-	-	-
	E	+500°C +5 0		-						-	-	-
	F	+150°C +3 0		-						-	○ ^{*2}	○
IEC 60068-2-14 Na (JIS C 60068-2-14 Na)	+70°C ±2 +85°C ±2 +100°C ±2 +125°C ±2 +155°C ±2 +175°C ±2 +200°C ±2	-	-5°C ±3 -10°C ±3 -25°C ±3 -40°C ±3 -55°C ±3 -65°C ±3	3 hrs. 2 hrs. 1 hrs. If not specified: 3 hrs.	-	Exposure time Within 10%	If not specified 5 cycles	Low temp.	○ ^{*2}	○ ^{*2}	○	
JASO D 014-4	+65°C ±2 +70°C ±2 +80°C ±2 +85°C ±2 +90°C ±2 +100°C ±2 +110°C ±2 +120°C ±2 +125°C ±2 +130°C ±2 +140°C ±2 +150°C ±2 +155°C ±2 +160°C ±2	-	-20°C ±3 -40°C ±3	20 min. 40 min. 60 min. 90 min.	-	Exposure time Within 10%	If not specified 5 cycles	Low temp.	○ ^{*2}	○ ^{*2}	○	
EIAJ ED-2531B Na	+60°C ±2 +65°C ±2 +70°C ±2 +75°C ±2 +80°C ±2 +85°C ±2 +90°C ±2 +95°C ±2 +100°C ±2	Ambient temp.	0°C ±3 -5°C ±3 -10°C ±3 -15°C ±3 -20°C ±3 -25°C ±3 -30°C ±3 -35°C ±3 -40°C ±3 -45°C ±3 -50°C ±3	3 hrs. 2 hrs. 1 hrs. 30 min. 10 min. If not specified: 3 hrs.	2 to 3 min.	Exposure time Within 10%	5 or 10 cycles	Low temp.	○ ^{*2}	○	○	

*1 The test results may not meet specifications depending on the quantity of specimens or the setting method.
 *2 Some models do not conform to the standard depending on test conditions. For further information, please contact ESPEC.
 *3 Applicable when equipped with the ambient-temperature exposure option.

Network

* Requires an intranet

Chambers can be operated from PC and Mobile Device



● **Remote monitoring and control (Ethernet connection)**

The chambers are equipped with unique web applications that enable chamber status to be confirmed and operated from a web browser screen (PC or mobile device). It is also possible to start operations with a PC or other device from a remote location.



● **Editing programs with a browser**

It is possible to edit the program patterns registered in the testing chamber with a web browser.

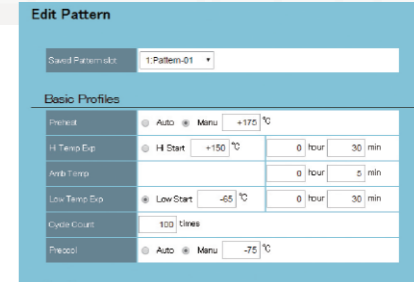


Remote monitoring and control

● **Email alert**


When an alarm is triggered, an e-mail is sent to the registered PC or mobile device's e-mail address. A notification can also be sent at the time of test completion. Set the recipient e-mail address from the Maintenance setting screen.

*Requires an intranet environment capable of sending e-mails.

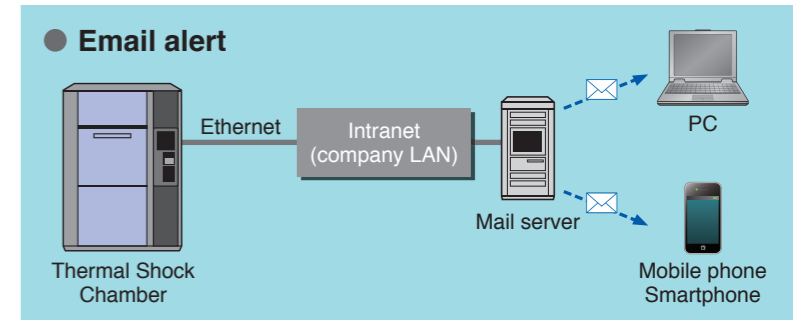

ESPEC OnlineCore (Sold separately)

Central control system recommended for multiple environmental test chambers installations

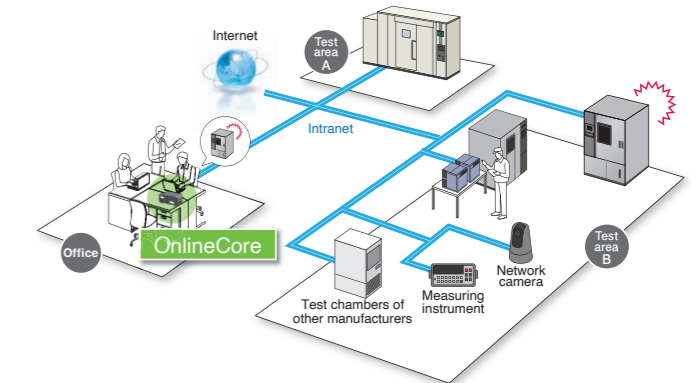

Making Operations More User-friendly



N-instrumentation P-310	
Setting	40 patterns(9999 cycles/pattern)
Exposure time setting	High temp. exposure/Low temp. exposure 99 hours and 59 min. (1min. unit) Ambient temp. exposure 99 hours and 59 min. (1min. unit)
Language	The language can be changed with the screen settings (Japanese / English / Chinese (simplified / traditional) / Korean).

● Color LCD touch panel

Wide 9-inch screen with LED backlight is clearer and provides faster display speed. Quick access can be set to have instant access to any page you often need, either registered test program start, on else.

● Test data records

Temperature setting and measurement values can be recorded on the internal memory and external memories.

● Test pause scheduling [Patent JP 5456600]

It is possible to program tests to pause after the end of cycle on exposure, or removing specimens from the test area during test.

Keep your test chamber in top condition and protect you from unexpected expenses!


● Maintenance monitor



● Check the equipment on the monitor screen

You can check the pressure of the refrigeration system and the temperature of the cooling water on the screen or PC connected to the network.

● Preventive maintenance

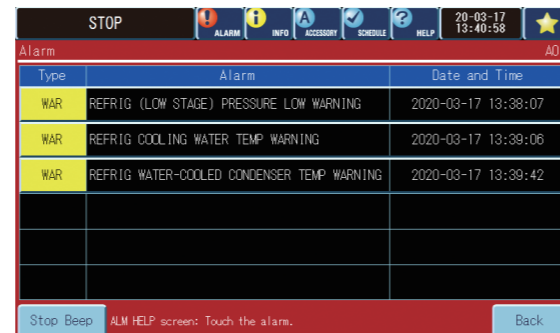

● For preventive maintenance

Maintenance warning function notifies the signs of refrigeration system failures before the chamber stops.


● Copy of test program patterns

Transfer test programs between chambers without the need of a PC, via USB stick.
* The USB memory is not included.

● Trend graph output on USB memory

Trend graphs can be displayed on the web application or downloaded on a USB memory. It is also possible to continuously register data on the USB memory if numerous data records are needed.

● Program copy and computer editing

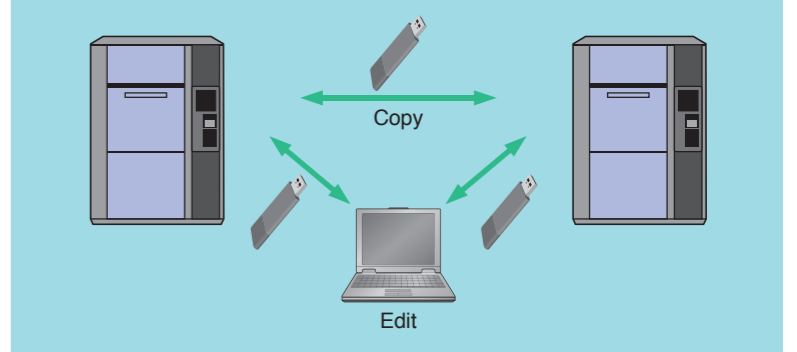

USB memory port

● Download edit programs online

Via the Pattern Manager Lite software installed on your PC, edit programs according to your testing needs, and upload them with a USB.

The Pattern Manager Lite software allows you to edit programs for your chamber, view and edit data as graph, etc. The software can be downloaded from the Test Navi website.

● Test Navi

(<https://www.test-navi.com/eng/index.html>)

This website provides practical knowledge on environmental testing that ESPEC has acquired through years of experience, as well as covering everything from the fundamentals to the latest information on environmental and reliability testing.

Product Registration Membership Website

- Updates for chamber controller software
- Search for environmental test standards

Environmental Test Standards

For Pattern Manager Lite Test methods download

- Download test profiles from a list of environmental test standards

UTILITY REQUIREMENTS


Model	EL type					ES type				EH type
	43EL-A	73EL-A	103EL-A	203EL-W	303EL-W	73ES-A	73ES-W	103ES-W	203ES-W	73EH-W
	Air-cooled		Water-cooled			Air-cooled	Water-cooled			Water-cooled
Test area capacity	40L	70L	110L	200L	300L	70L		110L	200L	70L
Power supply	200V AC	49A	70A	70A	110A	120A	78A		120A	112A
	220V AC	47A	70A	70A	110A	120A	75A		120A	108A
	380/400/415V AC	27A	45A	45A	65A	70A	50A		70A	60A
Air	0.4 to 0.7 MPa (4 to 7 kg/cm ² G)									
Condensation load (KJ/h) ¹	50Hz	—		95700		—		59700		95700
	60Hz	—		96100		—		64800		104600
Cooling water supply rate (at reference water temp.+32°C) ^{1,2}	—		4.6 m ³ /h			—		3.1 m ³ /h		4.6 m ³ /h
Water pressure	—		0.2 to 0.5 MPa (2 to 5 kg/cm ²)			—		0.2 to 0.5 MPa (2 to 5 kg/cm ²)		
Piping connection size	—		32A			—		32A		
Outside dimensions (mm) ³	W 1140	W 1310	W 1550	W 1550	W 1870	W 1310	W 1550	W 1550	W 1310	
	H 1900	H 1900	H 1900	H 1900	H 1900	H 1900	H 1900	H 1900	H 1900	
	D 1270 [1305]	D 1470 [1505]	D 1470 [1505]	D 1770 [1805]	D 1770 [1805]	D 1470 [1505]	D 1470 [1505]	D 1770 [1805]	D 1770 [1805]	

¹ Maximum possible value during temperature recovery.

² Rate depends on the cleanliness of the heat exchanger.

³ Excluding protrusions. Dimensions in brackets include the instrument panel.

DIMENSIONS

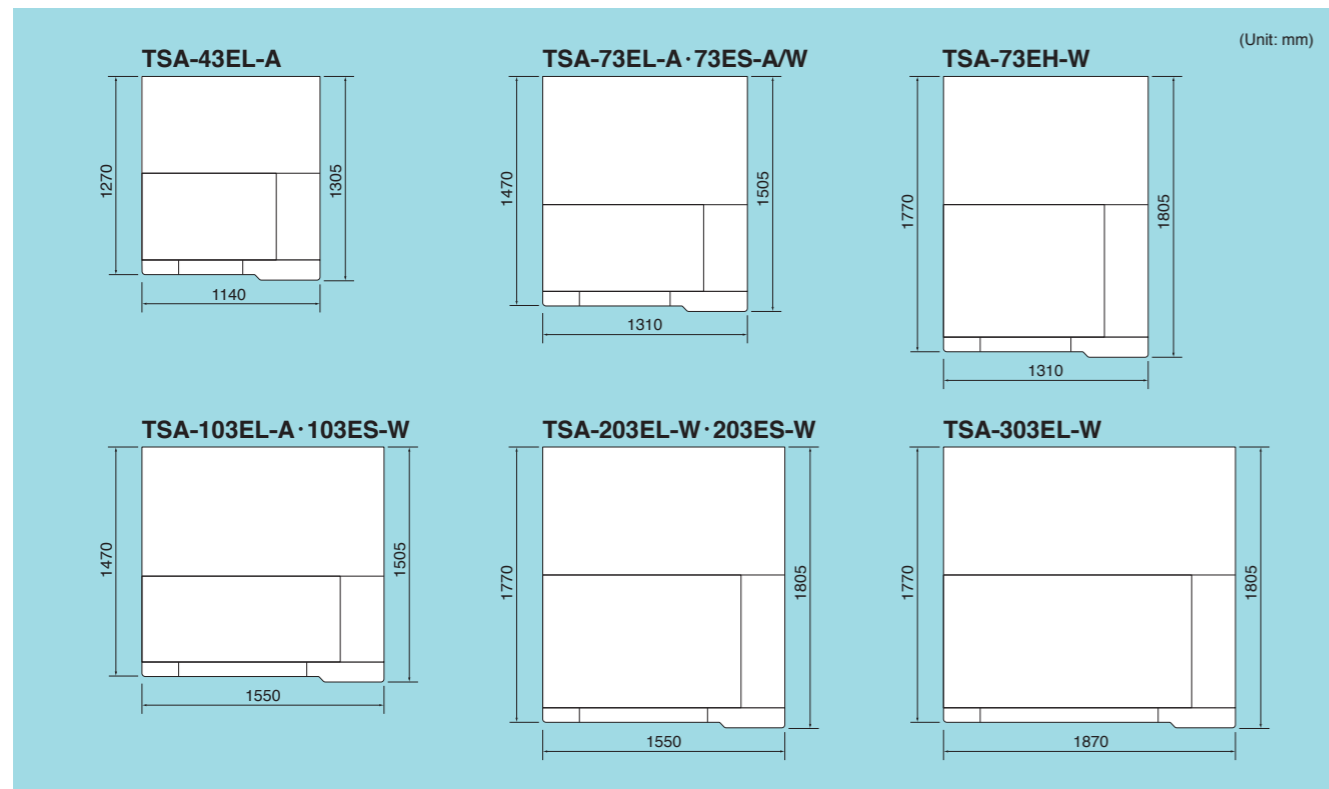

EL Type

Model	TSA-43EL-A	TSA-73EL-A	TSA-103EL-A	TSA-203EL-W	TSA-303EL-W		
System	Two-zone test by means of damper switching						
Performance ¹	Test area	High temp. exposure range ²				Ambient temp. +50 to +200°C (+122 to +392°F)	
		Low temp. exposure range				-65 to 0°C (-85 to +32°F)	
		Temp. fluctuation				±0.5°C	
Performance ¹	Hot chamber	Pre-heat upper limit				+205°C (+401°F)	
		Temp. heat up time ³				Ambient temp. to +200°C (+392°F) Within 10 min. Within 15 min.	
		Pre-cool lower limit				-75°C (-103°F)	
Performance ¹	Cold chamber	Temp. pull down time ³				Ambient temp. to -70°C (-94°F) Within 70 min. Within 40 min. Within 60 min. Within 70 min. Within 40 min.	
		Recovery conditions					
		Temp. recovery time ⁴					
Construction	Interior material					Stainless steel plate	
	Door					Manually operated sliding door with unlock button	
	Heater					Stripped wire heater	
Construction	Refrigerator unit	System				Mechanical cascade refrigeration system	
		Air-cooled condenser		Water-cooled condenser			
		Compressor					Hermetically sealed rotary compressor Hermetically sealed scroll compressor
Construction	Refrigerant	Low GWP Refrigerant				R-508A, R-404A[R-449A is available on request] R-23, R-404A[R-449A is available on request]	
		Cooler					Plate fin cooler, cold accumulator
		Air circulator					Sirocco fan
Damper driving unit					Air cylinder		
Inside dimensions (W x H x D mm)		240 x 460 x 370	410 x 460 x 370	650 x 460 x 370	650 x 460 x 670	970 x 460 x 670	
Test area load resistance		30 kg (Equally distributed load)		50 kg (Equally distributed load)			
Outside dimensions (W x H x D mm) ⁵		1140 x 1900 x 1270 [1305]	1310 x 1900 x 1470 [1505]	1550 x 1900 x 1470 [1505]	1550 x 1900 x 1770 [1805]	1870 x 1900 x 1770 [1805]	
Weight		Approx. 730 kg	Approx. 900 kg	Approx. 1050 kg	Approx. 1200 kg	Approx. 1420 kg	
Utility requirements	Allowable ambient conditions					0 to 40°C (+32 to +104°F)	
	Power supply ⁶	200V AC 3ø 50/60Hz	49A	70A	70A	110A	120A
		220V AC 3ø 60Hz	47A	70A	70A	110A	120A
		380/400/415V AC 3ø 50Hz	27A	45A	45A	65A	70A
	Cooling water supply pressure		—			0.2 to 0.5 MPa (2 to 5 kg/cm ²)	
	Cooling water supply rate ⁷		—			4.6 m ³ /h (ref. water temp.: +32°C)	
Operating cooling water temp. range		—			+5 to +38°C (+41 to +100°F)		
Maximum noise level ⁸		65 dB			62 dB	65 dB	

¹ Air-cooled: Ambient temperature of +23°C, relative humidity 65%rh and no specimens.

Water-cooled: Ambient temperature of +23°C, relative humidity 65%rh, no specimens and a cooling water temperature of +25°C
Performance shown above conforms to IEC 60068-3-5: 2001

² If the high-temperature exposure range lower limit +60°C is required, select the "ambient-temperature exposure" option

³ Temperature heat-up/pull-down time in each hot/cold chamber during standby operation.

⁴ Tolerance in temperature recovery time is based on IEC60068-2-1 and IEC60068-2-2

⁵ Excluding protrusions. Dimensions in brackets include the instrument panel.

⁶ 400/415V AC models comply with CE marking.

220V AC is available with or without CE marking.

⁷ Rate depends on the cleanliness of the heat exchanger

⁸ Noise level was measured in an anechoic room at a height of 1.2 m from the floor and a distance of 1 m from the chamber front panel (ISO 1996-1:2003 A-weighted sound pressure level). Actual noise emissions may increase because of surrounding reverberations in the place of installation, therefore use caution in selecting a place of use.

ES Type

Model	TSA-73ES-A/W	TSA-103ES-W	TSA-203ES-W		
System	Two-zone or three-zone test by means of damper switching				
Performance ¹	Test area	High temp. exposure range ²		+60 to +200°C (+140 to +392°F)	
		Low temp. exposure range		-70 to 0°C (-94 to +32°F)	
		Temp. fluctuation		±0.5°C	
	Hot chamber	Pre-heat upper limit		+205°C (+401°F)	
		Temp. heat up time ³		Ambient temp. to +200°C (+392°F) Within 15 min.	
	Cold chamber	Pre-cool lower limit		-75°C (-103°F)	
		Temp. pull down time ³		Ambient temp. to -75°C (-103°F) Within 40 min. Within 50 min. Within 45 min.	
	Temp. recovery	Recovery conditions		<ul style="list-style-type: none"> Three-zone High-temp. exposure: +150°C, 30 min. Ambient-temperature exposure: Ambient temperature, 5 min. Low-temp. exposure: -65°C, 30 min. Power supply voltage: Rated voltage Sensor position: Upstream 	
		Temp. recovery time ⁴		<ul style="list-style-type: none"> Specimen 6.5 kg Plastic molded ICs: 5 kg Specimen basket/brackets: 1.5 kg Specimen 7.5 kg Plastic molded ICs: 5 kg Specimen basket/brackets: 2.5 kg Specimen 26 kg Plastic molded ICs: 20 kg Specimen basket/brackets: 6 kg 	
	Construction	Interior material			Stainless steel plate
Door			Manually operated sliding door with unlock button		
Heater			Stripped wire heater		
Refrigerator unit		System			Mechanical cascade refrigeration system
		Air-cooled condenser or water-cooled condenser		Water-cooled condenser	
		Compressor			Hermetically sealed scroll compressor
		Refrigerant Low GWP Refrigerant			R-23,R-404A[R-449A is available on request]
Cooler			Plate fin cooler, cold accumulator		
Air circulator			Sirocco fan		
Damper driving unit			Air cylinder		
Inside dimensions (W x H x D mm)		410 x 460 x 370	650 x 460 x 370	650 x 460 x 670	
Test area load resistance		30 kg (Equally distributed load)	50 kg (Equally distributed load)		
Outside dimensions (W x H x D mm) ⁵		1310 x 1900 x 1470 [1505]	1550 x 1900 x 1470 [1505]	1550 x 1900 x 1770 [1805]	
Weight		Approx. 1050 kg	Approx. 1150 kg	Approx. 1400 kg	
Utility requirements	Allowable ambient conditions			0 to +40°C (+32 to +104°F)	
	Power supply ⁶	200V AC 3ø 50/60Hz		78A	
		220V AC 3ø 60Hz		75A	
		380/400/415V AC 3ø 50Hz		50A	
	Cooling water supply pressure		0.2 to 0.5 MPa (2 to 5 kg/cm ²) (water-cooled specification)		
	Cooling water supply rate ⁷		3.1 m ³ /h (reference water temp: +32°C) (water-cooled specification)		
Operating cooling water temp. range		+5 to +38°C (water-cooled specification)			
Maximum noise level ⁸		65 dB			

¹ Air-cooled: Ambient temperature of +23°C, relative humidity 65%rh and no specimens.

Water-cooled: Ambient temperature of +23°C, relative humidity 65%rh, no specimens and a cooling water temperature of +25°C

Performance shown above conforms to IEC 60068-3-5: 2001

² If the high-temperature exposure range lower limit +60°C is required, select the "ambient-temperature exposure" option

³ Temperature heat-up/pull-down time in each hot/cold chamber during standby operation.

⁴ Tolerance in temperature recovery time is based on IEC60068-2-1 and IEC60068-2-2

⁵ Excluding protrusions. Dimensions in brackets include the instrument panel.

⁶ 400/415V AC models comply with CE marking.

220V AC is available with or without CE marking.

⁷ Rate depends on the cleanliness of the heat exchanger

⁸ Noise level was measured in an anechoic room at a height of 1.2 m from the floor and a distance of 1 m from the chamber front panel (ISO 1996-1:2003 A-weighted sound pressure level). Actual noise emissions may increase because of surrounding reverberations in the place of installation, therefore use caution in selecting a place of use.

EH Type

Model	TSA-73EH-W			
System	Two-zone or three-zone test by means of damper switching			
Performance ¹	Test area	High temp. exposure range	+60 to +200°C (+140 to +392°F)	
		Low temp. exposure range	-70 to 0°C (-94 to +32°F)	
		Temp. fluctuation	±0.5°C	
	Hot chamber	Pre-heat upper limit	+205°C (+401°F)	
		Temp. heat up time ²	Ambient temp. to +200°C (+392°F) Within 15 min.	
	Cold chamber	Pre-cool lower limit	-77°C (-106.6°F)	
		Temp. pull down time ²	Ambient temp. to -75°C (-103°F) Within 50 min.	
	Temp. recovery	Recovery conditions	<ul style="list-style-type: none"> Two-zone High-temp. exposure: +150°C, 15 min. Low-temp. exposure: -65°C, 15 min. Power supply voltage: Rated voltage Sensor position: Downstream Specimen 5 kg Plastic molded ICs: 3.5 kg Specimen basket/brackets: 1.5 kg 	
		Temp. recovery time ³	Within 5 min.	
	Construction	Interior material		Stainless steel plate
Door		Manually operated sliding door with unlock button		
Heater		Stripped wire heater		
Refrigerator unit		System		Mechanical cascade refrigeration system Water-cooled condenser
		Compressor		Hermetically sealed scroll compressor
		Expansion mechanism		Electronic expansion valve, other
		Refrigerant Low GWP Refrigerant		R-23,R-404A[R-449A is available on request]
Cooler		Plate fin cooler, cold accumulator		
Air circulator		Sirocco fan		
Damper driving unit		Air cylinder		
Inside dimensions (W x H x D mm)		410 x 460 x 370		
Test area load resistance		30 kg (Equally distributed load)		
Outside dimensions (W x H x D mm) ⁴		1310 x 1900 x 1770 [1805]		
Weight		Approx. 1250 kg		
Utility requirements	Allowable ambient conditions		0 to +40°C (+32 to +104°F)	
	Power supply ⁵	200V AC 3ø 50/60Hz		112 A
		220V AC 3ø 60Hz		108 A
		380/400/415V AC 3ø 50Hz		60 A
	Cooling water supply pressure		0.2 to 0.5 MPa (2 to 5 kg/cm ²)	
	Cooling water supply rate ⁶		4.6 m ³ /h (reference water temp: +32°C)	
Operating cooling water temp. range		+5 to +38°C		
Maximum noise level ⁷		65 dB		

¹ Ambient temperature of +23°C, relative humidity 65%rh, no specimens and a cooling water temperature of +25°C

Performance shown above conforms to IEC 60068-3-5: 2001

² Temperature heat-up/pull-down time in each hot/cold chamber during standby operation.

³ Tolerance in temperature recovery time is based on IEC60068-2-1 and IEC60068-2-2

⁴ Excluding protrusions. Dimensions in brackets include the instrument panel.


⁵ 400/415V AC models comply with CE marking.

220V AC is available with or without CE marking.

⁶ Rate depends on the cleanliness of the heat exchanger


⁷ Noise level was measured in an anechoic room at a height of 1.2 m from the floor and a distance of 1 m from the chamber front panel (ISO 1996-1:2003 A-weighted sound pressure level). Actual noise emissions may increase because of surrounding reverberations in the place of installation, therefore use caution in selecting a place of use.

FITTINGS

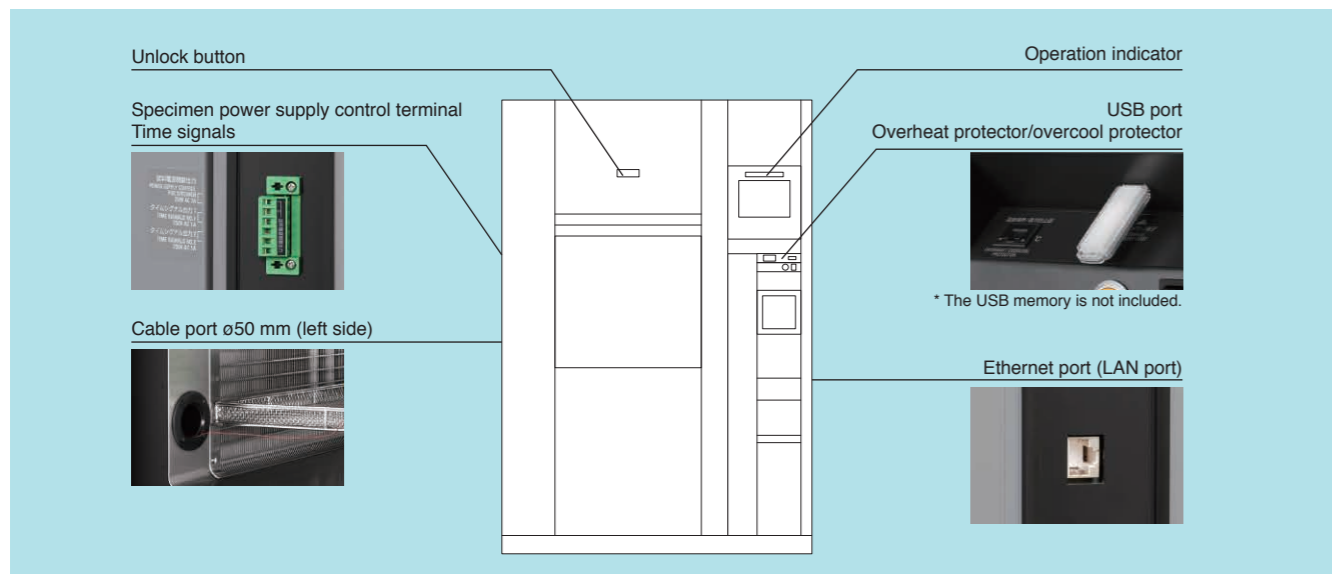

ACCESSORIES

- Specimen basket (18-8 Cr-Ni stainless steel/5 mesh metal basket)
 - TSA-43 (W230 x H40 x D356 mm/load capacity up to 2.5 kg) 2
 - TSA-73 (W400 x H40 x D356 mm/load capacity up to 5 kg) 2
 - TSA-103 (W640 x H40 x D356 mm/load capacity up to 5 kg) 2
 - TSA-203 (W640 x H40 x D656 mm/load capacity up to 17 kg) 2
 - TSA-303 (W960 x H40 x D656 mm/load capacity up to 17 kg) 2



- Shelf brackets (shelf attachment pitch 60 mm, adjustable in 7 levels) 2 sets
- Breaker handle stopper 1
- Cartridge fuse
 - 5A (200V AC specification) 2
 - 10A (220/380/400/415V AC specification) 1
- Cable port rubber plug 1
- Nipple (water-cooled specification only) 1
- Strainer (water-cooled specification only) 1
- Strainer element (water-cooled specification only) 1
- Gasket 1
- Operation manual 1
- Warranty card 1

Power cable is not included.

SAFETY DEVICES

- Leakage breaker (200, 220V AC specifications)
- Circuit breaker (380, 400/415V AC specifications)
- Electrical compartment door switch
- Test area door switch
- Hot chamber overheat protection switch
- Cold chamber overheat protection switch
- Hot chamber overheat protector (controller)
- Cold chamber overheat protector (controller)
- Circuit breaker for air circulator
- Refrigerator high/low pressure switches
- Compressor built-in protector (except TSA-43EL)
- Compressor temperature switch
- Thermal relay for compressor (TSA-43EL only)
- Water suspension relay (water-cooled specification only)
- Air circulator thermal relay
- Motor reverse prevention relay
- Air pressure switch
- Fuse
- Cooling tower interlock terminal (water-cooled specification only)
- Compressor circuit breaker
- Heater circuit breaker
- Test area overheat protector (controller)
- Test area overcool protector (controller)
- Overheat protector/overcool protector
- Air purge valve
- Specimen power supply control terminal

Options

UTILITY

Power cable

- 5 m
- 10 m
- * The chamber does not come with a power cable.

Plug socket

- To supply power to external equipment
- 2 plug sockets
 - Rated capacity 100V AC 3A (Total capacity)



Built-in air compressor

This option is useful in case sufficient external primary air supply cannot be secured.

Air is required to air cylinders that drive dampers and the test area door.

Casters

- Installed for mobility.
- 6 casters (4 for TSA-43EL)
 - 4 leveling feet

TEST SAMPLE SETTING

Automatic door

Automatic sliding door (vertical) operated by single-touch button. Equipped with 2 safety mechanisms: a photoelectric sensor, and a touch sensor. A door stop switch is also set.



Door open/close switch

Additional cable port

Provided in addition / replacement of the standard cable port (left side)

- ø50 mm round
- Flat cable port (25 x 100 mm slot)



ø50 mm Flat cable port

Cable port rubber plug

Prevents air leakage from the cable port.

- ø50 mm for round port
- For flat cables
- Spiral-wrapped plug(2m)



ø50 mm for round port For flat cables Spiral-wrapped plug

Specimen basket/shelf brackets

Equivalent to standard accessory.

- Material: stainless steel (5 mesh)

Heavy-duty shelf

Use to hold heavy specimens exceeding the load capacity of the standard specimen basket.

- Load capacity: 30 kg

NETWORK

I/O interface

Communication ports to connect the chamber to a PC.

- RS-485
- RS-232C
- GPIB

Communication cable


- RS-485 5 m/10 m/30 m
- GPIB 2 m/4 m

Options

EASY OPERATION


Defrost-free operation

● 1000 cycles test time comparison example

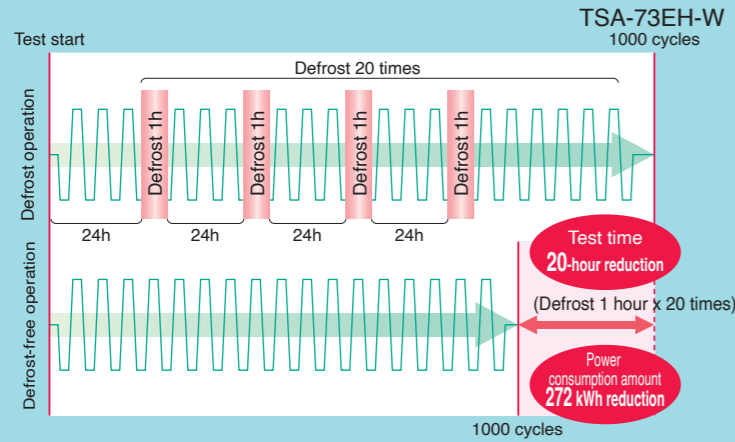

Test conditions (Two-zone, No test halt)
High-temp. exposure : +150°C, 15 min. Cooling water temp. : +25°C
Low-temp. exposure : -65°C, 15 min. Specimen : No specimen
Outside conditions : +23°C/60%rh

For two-zone tests, enables continuous tests without requiring defrosting for up to 500 hours max. ESPEC has developed a unique structure that prevents the penetration of outside air and uses recirculated air during testing to stop frosting on the low-temperature side. This enables continuous tests up to 500 hours, so around 20 defrost cycles during this period can be eliminated. This option can reduce both the test time in the amount of the defrosting time (approx. 60 minutes each time) and the power consumption required for defrosting (13.6 kWh each time).

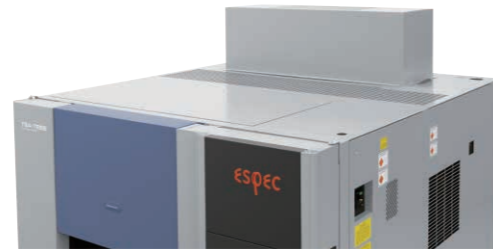

* The TSA-43EL-A, 73EL-A, 73ES-A and 103EL-A have a 300-mm protrusion on the top.

Model	TSA-43EL	TSA-73EL, ES	TSA-103EL, ES	TSA-203EL, ES	TSA-303EL	TSA-73EH
Number of cycles	Maximum 500 cycles (Or maximum 500 hours)					Maximum 1000 cycles (Or maximum 500 hours)
High-temp. exposure/time	+125°C/30 min.					+150°C/15 min.
Low-temp. exposure/time	-40°C/30 min.					-65°C/15 min.
Outside conditions	+23°C/60%rh or less					
Cooling water temp.	+25°C					
Power supply voltage	Rated voltage					
Sensor position	Upstream					Downstream
Specimen	1.5 kg Plastic molded ICs 1.0 kg Specimen basket/shelf brackets 0.5 kg	5.0 kg Plastic molded ICs 3.5 kg Specimen basket/shelf brackets 1.5 kg	6.0 kg Plastic molded ICs 3.5 kg Specimen basket/shelf brackets 2.5 kg	10.0 kg Plastic molded ICs 7 kg Specimen basket/shelf brackets 3 kg	10.5 kg Plastic molded ICs 7 kg Specimen basket/shelf brackets 3.5 kg	5.0 kg Plastic molded ICs 3.5 kg Specimen basket/shelf brackets 1.5 kg
Temp. recovery time	Within 15 min.	Within 5 min.			Within 10 min.	Within 5 min.

Ambient-temperature exposure (EL type only)

Enables three-zone tests by adding a damper mechanism and an air circulator.
· High temp. exposure range: +60 to +200°C

Options

EASY OPERATION


Product temperature control

A sensor is attached to the product to control the chamber based on the product temperature. The product temperature reaches and maintains the temperature setting as fast and accurately as possible. (Cannot be combined with Eco operation mode.)


- Number of measuring points: 1
- Location: Chamber front, left-side panel
- Accessory: Thermocouple type T (copper, copper-nickel) x1*
- * 2 when simultaneously equipped with a recorder



● Measurement example TSA-73ES-A

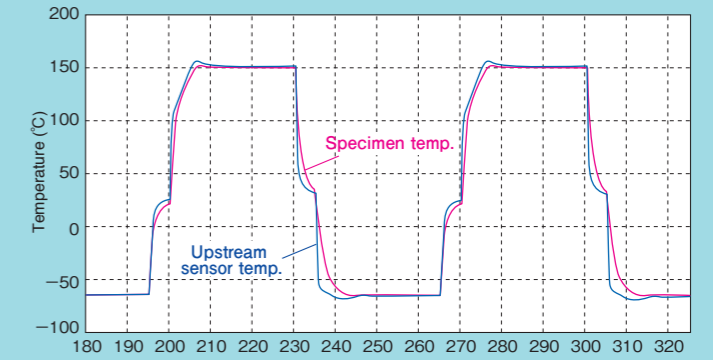

Test conditions
High temp. exposure +150°C 30 min. Specimen Plastic molded ICs (3.5 kg)
Ambient temp. exposure 5 min. Specimen baskets 2nd and 6th level from top
Low temp. exposure -65°C 30 min. Control points 28-pin QFP (quad flat package) with sensor installed at center of 6th level

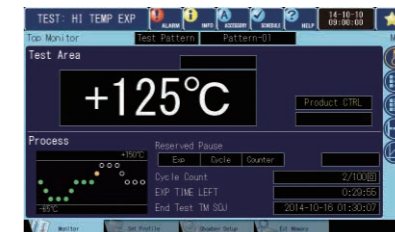


Product temperature monitor with trigger function

Two sensors are attached to the specimen and the temperature of the specimen displayed on the instrumentation is monitored. The option has a trigger function that switches to the exposure test after the specimen temperatures reach the temperature setting, so even more precise tests can be run. It can also record the temperatures of the specimen and the test area when connected to a temperature recorder.

- Number of measuring points: 2
- Location: Chamber front, left-side panel
- Accessory: Thermocouple type T (copper, copper-nickel) x2*
- * 4 when simultaneously equipped with a recorder

● Measurement example

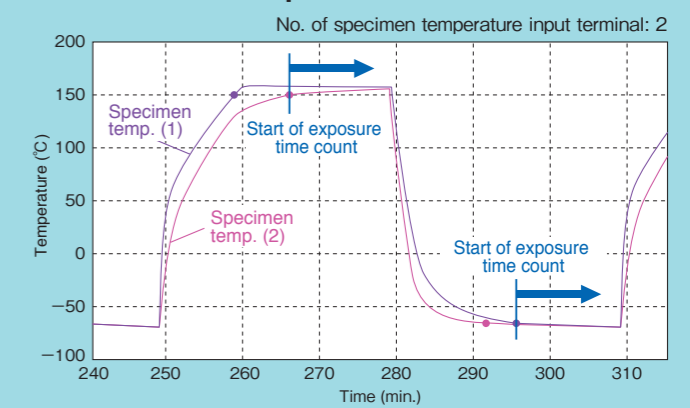

Options

LOGGING

Paperless recorder

Records the temperature of each section such as the temperature inside the chamber.

Display: 5.7 inch color touch panel

Inputs: 6 channels

Temperature range: -100 to +220°C

Internal recording media:

Flash memory 8MB

External memory

CF memory card port

(Includes a 256 MB CF card)

USB memory port



Chart recorder


RK-61 1 pen

RK-63 3 pens

RK-64 6 dots

Temperature range: -100 to +220°C

Effective recording chart width 100 mm



Recorder wiring

Preparation of a power cable, temperature sensor, and conductor grounding wire for additional installation in the future.

Recorder terminal

Used to output the temperature Within test area, hot chamber, and cold chamber.



Thermocouple

Attached to specimen to measure specimen temperature.

Thermocouple with a brass ball tip

Thermocouple type T (Copper/ Copper-Nickel)

· 2 m

· 4 m

· 6 m



Expose signal output terminal

A signal is output via a contact switch when test area temperature is Within the user-selected range. This signal can be used to control peripheral instruments, like applying a voltage to specimens only during high temperature exposure, or monitoring test operation from a remote point.



Power meter

Accumulates the amount of power the chamber uses.

Applying DC power supply

Capable of applying voltage to the specimen, used for bias testing.


· 5V

· 12V

· 15V

· 24V

· 48V

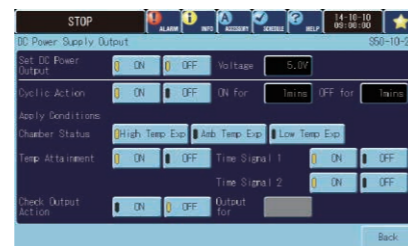

Total cycle counter

Indicates cycle counts.

· With reset function

· Display range: 1 to 99999999



Options

SAFETY

Additional overheat protector

Additional preventive measure can be taken for excessive temperature rise in the chamber, in addition to the standard equipped overheat protector.

External alarm terminal

If the safety device of the chamber is activated, the external alarm terminal will notify it to a remote point.

Status indicator light

Select light color, lighting, and blinking or buzzer sound.

Pole length: 285mm

The length can be reduced by 10mm (up to 55mm) if so requested.

Height from the ceiling of the chamber when the pole length is 285mm.

· Level 1, 438 mm

· Level 2, 478 mm

· Level 3, 518 mm

· Level 4, 558 mm

Height from the ceiling of the chamber when the pole length is 80mm.

· 5 colors, 393 mm

*In case of 5 colors, the light color, lighting, blinking and buzzer sound patterns are fixed.



Level 3

Emergency stop pushbutton

Stops the chamber immediately.



With guard



With cover

Anchoring fixtures

Used to bolt the chamber to the floor.

Chamber dew tray

Prevents water leaks from the chamber onto the floor.

*The use of casters is recommended to facilitate operation.

*To prevent damage in the event of water leakage, other preventive measures are also available.

DOCUMENTS

Operation manual

· CD
· Booklet

Reports & certificates

· Testing and inspection report
· Test data
· Temperature uniformity measurement
· Calibration report
· Calibration certificate
· Traceability system chart
· Traceability certificate



Safety precautions

- Do not use specimens which are explosive or inflammable, or which contain such substances. To do so could be hazardous, as this may lead to fire or explosion.
- Do not place corrosive substances in the chamber. If corrosive substances are generated by the specimen, the life of the chamber may be significantly shortened specifically because of the corrosion of stainless steel and copper and because of the deterioration of resin and silicon.
- Do not place life forms or substances that exceed allowable heat generation.
- Be sure to read the operation manual before operation.

600L and larger capacities

Type	TSA-603EL-W	TSA-1100H-W	TSA-3300H-W	TSA-12000H-W	TSA-202D-W
Test area capacity	603L	1100L	3300L	11625L	200L
System	Two-zone or three-zone test by means of damper switching				
High temp. exposure range ²	+65 to +150°C	+60 to +180°C	+60 to +180°C	+65 to +130°C	For Dewcycle test -10 to +100°C
Low temp. exposure range	-50 to 0°C	-60 to -10°C	-60 to -10°C	-60 to 0°C	For Dewcycle test -40 to +10°C
Temp. recovery	Recovery time: Within 10min. <Conditions> High-temp. exposure: +65°C/40min. Low-temp. exposure: -35°C/30min. Sensor position: Upstream	Recovery time: Within 10min. <Conditions> High-temp. exposure: +150°C/60min. Low-temp. exposure: -50°C/60min. Sensor position: Upstream	Recovery time: Within 10min. <Conditions> 2 zone High-temp. exposure: +85°C/60min. Low-temp. exposure: -40°C/60min. Sensor position: Upstream	Recovery time: Within 15min. <Conditions> High-temp. exposure: +85°C/480min. Low-temp. exposure: -40°C/480min. Sensor position: Upstream	Recovery time: Within 5min. <Conditions> High-temp. with humid. exposure: +25°C 95%rh/60min. Low-temp. with humid. exposure: -35°C/60min. Sensor position: Upstream
Inside dimensions (W×H×D mm)	1200×670×750	1000×1100×1000	2000×1100×1500	3100×1500×2500	650×460×670



TSA-603EL-W



TSA-1100H-W



TSA-202D-W



TSA-3300H-W



TSA-12000H-W

Various Thermal Shock Chambers

In addition to the lineup of thermal shock chambers below, our products can be tailored to your application.

Elevator Type Air to Air Thermal Shock Chamber **TSD**

The two-zone thermal shock chambers have been developed to meet major International standards for thermal shock testing.

System	Two-zone transition by vertical transfer of specimens
Exposure	+205°C/-77°C
Capacity / Inside dimension (mm)	100L / W710 x H345 x D410

* Also compatible with 200-liter and larger capacities.



Elevator Type Air to Air Thermal Shock Chamber **TSE**

Meets standard tests for a temperature recovery time for 2-zone (+150°C, -65°C) up-stream air of 5 minutes or less. This air-cooled thermal shock chamber has a compact design but the same performance of large equipment.

System	Two-zone transition by vertical transfer of specimens
Exposure	+200°C/-65°C
Capacity / Specimen basket dimension (mm)	10.9L / W320 x H148 x D230

* 300°C spec. is also available.



Liquid to Liquid Thermal Shock Chamber **TSB**

The "liquid to liquid" thermal shock testing draw more and more attention for its ability to impose higher stress on specimens than the classic "air to air" thermal shock tests, but also for delivering quicker test results.

System	Two-liquid bath system with specimen basket transfer
Exposure	+200°C/-65°C
Capacity / Specimen basket dimension (mm)	2.1L / W150 x H150 x D200

* Also compatible with 4.5-, 10-, 15- 30-liter and larger capacities.



ESPEC CORP. <https://www.espec.co.jp/english>

Head Office

3-5-6, Tenjinbashi, Kita-ku, Osaka 530-8550, Japan
Tel: 81-6-6358-4741 Fax: 81-6-6358-5500

ESPEC NORTH AMERICA, INC.

Tel: 1-616-896-6100 Fax: 1-616-896-6150

ESPEC EUROPE GmbH

Tel: 49-211-361850-0

ESPEC ENVIRONMENTAL CHAMBERS

SALES AND ENGINEERING LTD. STI. (Turkey)

Tel: 90-212-438-1841 Fax: 90-212-438-1871

ESPEC ENVIRONMENTAL EQUIPMENT (SHANGHAI) CO., LTD.

Head Office

Tel: 86-21-51036677 Fax: 86-21-63372237

BEIJING Branch

Tel: 86-10-64627025 Fax: 86-10-64627036

GUANGZHOU Branch

Tel: 86-20-83317826 Fax: 86-20-83317825

SHENZHEN Branch

Tel: 86-755-83674422 Fax: 86-755-83674228

SUZHOU Branch

Tel: 86-512-68028890 Fax: 86-512-68028860

TIANJIN Branch

Tel: 86-22-26210366 Fax: 86-22-26282186

XI'AN Branch

Tel: 86-29-88312908 Fax: 86-29-88455957

CHENGDU Branch

Tel: 86-28-88457756 Fax: 86-28-88474456

WUXI Branch

Tel: 86-510-82735036 Fax: 86-510-82735039

ESPEC TEST TECHNOLOGY (SHANGHAI) CO., LTD.

Tel: 86-21-68798008 Fax: 86-21-68798088

ESPEC ENGINEERING (THAILAND) CO., LTD.

Tel: 66-3-810-9353 Fax: 66-3-810-9356

ESPEC ENGINEERING VIETNAM CO., LTD.

Tel: 84-24-22208811

ISO 9001 (JIS Q 9001)

Quality Management System Assessed and Registered

ESPEC CORP. has been assessed by and registered in the Quality Management System based on the International Standard ISO 9001:2015 (JIS Q 9001:2015) through the JSA Solutions Co.,Ltd.

* The organization of these certificates is
ESPEC CORP. Japan.



ISO 27001 (JIS Q 27001)

Quality Management System Assessed and Registered

* The organization of these certificates is
ESPEC CORP. Japan.



ISO 14001 (JIS Q 14001)

Environmental Management System Assessed and Registered

* The organization of these certificates is
ESPEC Group Japan.



●All information is subject to change without prior notice due to technical changes.

●Corporate names and trade names mentioned in this catalog are trademarks or registered trademarks.