Securities ID code:6859

Reference

Company Presentation and Business Overview

ESPEC CORP. May 23, 2024

Company Profile

<u>Industry-leading manufacturer of environmental test chambers</u>

ESPEC CORP. Name

3-5-6, Tenjinbashi, Kita-ku, Osaka Head Office

Representative Representative Director and President

Satoshi Arata

July 25, 1947 Established

Incorporated January 13, 1954

¥6,895 million Paid-up Capital

23,781,394 Shares Issued shares

1,775 (consolidated) **Employees**

Manufacture and Sales of Environmental Test Chambers, Main Business

Energy Device Equipment, Semiconductor Equipment and

Plant Factory.

After-sales Service, Laboratory Testing Services and others.

Share of Environmental Test Chambers

Over 30% worldwide, Over 60% domestic

Head Office

(As of March 31, 2024)

^{*} Market shares are ESPEC estimates

Global Network

Consolidated Subsidiaries 14 companies

(Global 9 companies, Domestic 5 companies) Global Network 50 locations 44 companies

Business Facilities in Japan: 16 Domestic Agencies in Japan: 46

ESPEC NORTH AMERICA, INC *

U.S.A

EUROPE

ESPEC EUROPE GmbH -ESPEC IKLIM KABINLERI SATIS VE MUHENDISLIK LIMITED SIRKETI

JAPAN

ESPEC CORP. *

- ●ESPEC TEST SYSTEM CORP. *
- **ESPEC ASSIST CORP.**
- **ESPEC MIC CORP.**
- **ESPEC THERMAL TECH SYSTEM CORP.** *
- **COSMOPIA HIGHTECH CORP. ***

ASIA

- SHANGHAI ESPEC ENVIRONMENTAL **EQUIPMENT CORP. ***
- **ESPEC ENVIRONMENTAL EQUIPMENT** (SHANGHAI) CO., LTD.
- **©ESPEC TEST EQUIPMENT (GUANGDONG) CO., LTD. ***
- **ESPEC TEST TECHNOLOGY (SHANGHAI) CO., LTD.**
- **ESPEC (CHINA) LIMITED**
- **ESPEC KOREA CORP.** *
- **ESPEC ENGINEERING (THAILAND) CO.,LTD** -ESPEC ENGINEERING VIETNAM CO., LTD.

-: Non-consolidated Subsidiaries

*Denotes company with production functions.

: Consolidated Subsidiaries

Summary of ESPEC Business (Per Market / Use)

		Main Products	Market	Use	Sales Composition (FY2023)
Equipment Business	Environmental Test Chambers	 Temperature & humidity chamber Thermal shock chamber Bench-top type temperature & humidity chamber HAST chamber Walk-in type temperature & humidity chamber Combined temperature & humidity chamber HALT & HASS test chamber FPD equipment 	 Electronic component and equipment market Automobile market Semiconductor market Pharmaceuticals, Cosmetics, Foods market LCD and Organic Electro- Luminescence market 	 For R & D For credibility and evaluation For production and inspection 	86%
	Energy Device Equipment	 LIB charge-discharge cycle evaluation equipment LIB safety evaluation system Fuel cells evaluation system 	Next generation automobile marketSecondary batteries marketFuel cells market	 For R & D For credibility and evaluation For safety evaluation For production 	
	Semiconductor Equipment	Burn-in system Semiconductor evaluation system	Semiconductor market Automobile market	For production and inspectionFor development and evaluation	
Service Business	After-sales Service and Engineering	• After-sales service • Construction around equipment	Electronic component and equipment marketAutomobile marketSemiconductor market	_	
	Laboratory Testing Services and Facility Rentals	•Laboratory testing services •Resale • Equipment rental •Calibration		For R & DFor credibility and evaluation	
Other Business	Environmental Conservation	Reforestation (Tree planting), Waterfront biotope restoration, Urban greening			29/
	Plant Production Systems	Plant factory, Equipment for growing plants	2%		

History of Environmental Test

What is Environmental Test

Test to analyze and evaluate effects of environmental factors such as temperature, humidity, pressure, and vibration on various industrial products like electronic components in order to ensure product quality.

1950s

The environmental test was JIS-standardized in Japan for consumer products.





1970s-1990s

"Reliability" and "quality control" became important issues in product development. Demand increased dramatically due to a rapid shift toward computerization and the use of electronic components.







Present

Demand is expanding in the development fields of IoT and next-generation automobiles against the backdrop of digitalization and decarbonization.



Consecutively selected as a winner of Ministry of Economy, Trade and Industry (METI) "Global Niche Top Companies Selection 100" (FY 2013, FY 2020)

1961 Japan's First Environmental Test Chamber



Low Temperature & Humidity Chamber "Lucifer"

Worldwide Market Share No.1



Over 60% domestic


Over 30% worldwide



Temperature & Humidity Chamber
s "Platinous J series"

* Market shares are ESPEC estimates

Transition in Business

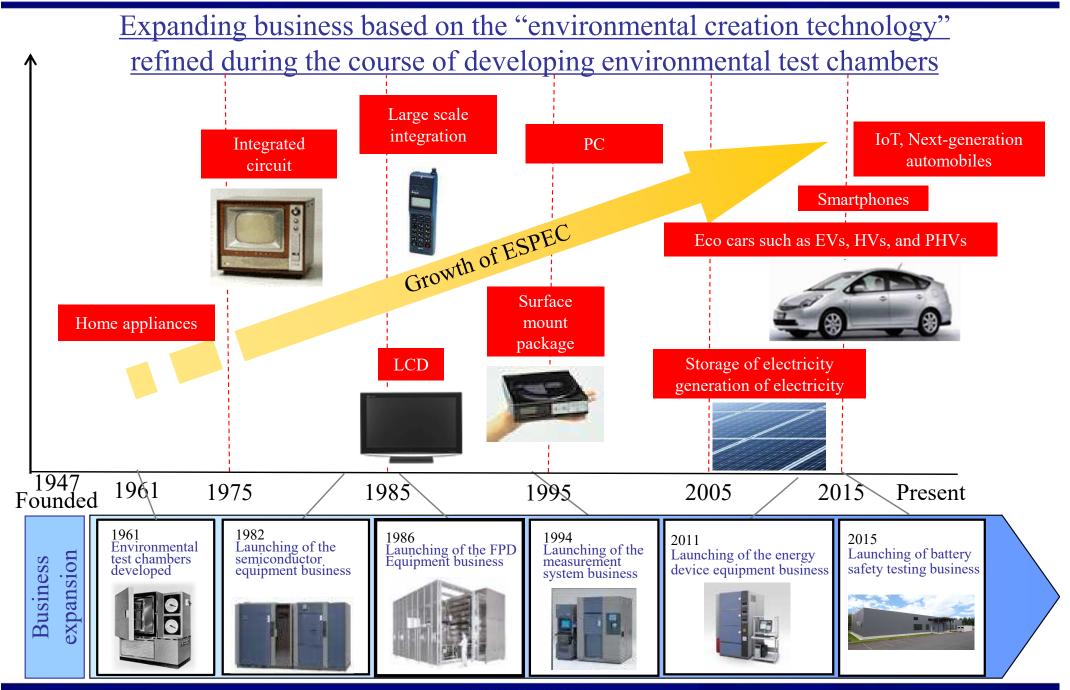

ESPEC's Strengths

Top Market Share

Technological Capabilities
Product and Service
Capabilities

Global Structure

Share of Environmental Test Chambers:

Over 30% worldwide, Over 60% domestic (ESPEC estimates)

First in Japan to develop environmental test chambers, rapidly established a brand in Japan and overseas and have held the top market share for many years

- •Developed a variety of products with high quality and meeting customer requirements
- Production technology capabilities that enable high-mix, low-volume production
- Total solutions for environmental tests, including products, laboratory testing services and technical support, and after-sales service capabilities

Provide products globally that comply with the needs of respective countries through an extensive global network

- •Consolidated subsidiaries: 14 (9 overseas, 5 domestic)
- •Overseas production bases: North America 1 company,

China 2 companies, South Korea 1 company

• Overseas network: 50 locations (countries or territories), 44 companies

Equipment Business: Usage Case with Environmental Test Chambers

Ensure reliability of new technologies and new products by repeatedly testing each component, module and finished product



Representative Examples for Environmental Testing

Electric Vehicle (EV) image

Device	Process/Test Condition		Our Products	
[Power Device]	Inspection	■Thermal shock test: -40°C⇔+125°C	Thermal shock chamber	
WHAT THE		■ High temperature exposure: + 175°C、+ 85°C	(Compact size) Oven	
Contract of the Contract of th		■Burn-in test	Burn-in chamber	
【In-vehicle Sensor】	Inspection	■Temperature cycle test of printed circuit board: - 40°C⇔+ 110°C	Temperature & humidity chamber (Platinous) /Oven	
		■ Temperature characteristic test after soldering: Linear change between -30°C and +85°C	Burn-in chamber, Rapid-rate thermal cycle chamber	
	Evaluation	■ Thermal shock test : -30°C⇔RT⇔+80°C、-55°C⇔+155°C	Thermal shock chamber	
[CCD/CMOS]	Production	■ Diffusion Test: +150°C	Compact size Oven	
		■ Drying after cleaning: +85°C	Clean Oven	
	Evaluation	■Screening: +85°C	Temperature chamber (Platinous) / Burn-in chamber	
	Inspection	■Temperature and humidity test: +85°C/+85%rh、+60°C/90%rh	Temperature & humidity chamber (Platinous)	
		■Acceleration test: + 120°C / 100%rh	HAST chamber	
		■ Thermal shock test : -40°C⇔+125°C、-20°C⇔+85°C	Thermal shock chamber	

Equipment Business: Main New Products

Release Date	Name of product	Features
Jan. 2024	Thermal Dependent Warpage Measurement System	 Visualize the warpage deformation of semiconductor packages and mounting substrates in a thermal environment. Contributes to solving bonding defect issues in mounting substrates caused by increased power consumption or heat generation.
Mar. 2023	Burn-In Chamber Support for High Heat Generation Load	 Enables precise temperature control even when semiconductors are in a state of high heat Inspection volumes increased significantly, contributes to shorter inspection times
Feb. 2023	Expanded Anechoic Box Thermostatic Chamber Lineup	• Supports temperature characteristics testing of 5G communications devices • Expanded four types with larger internal volume to support larger test products
Apr. 2022	Environmental Stress Chamber AR Series Featuring R-473A Low-GWP Refrigerant	•Greatly reduces GWP values (an 88% reduction), and also enables energy conservation during operation *GWP: Global Warming Potential
Jun. 2021	Ultra-Low-Temperature Freezers	•Used for small lot storage to -75°C for items such as COVID-19 vaccines
Apr. 2021	Freezer for Temperature Controlled Transport	 Optimal for small-lot transport and storage of items such as COVID-19 vaccines Vibration resistant, energy efficient and portable
Feb. 2021	Vacuum Low-Temperature Heating Cooker – Model Change	•Enables precise control of not only temperature but also the degree of vacuum
Aug. 2020	Expanded Environmental Stress Chamber AR Series Lineup	•Expanded the series with launch of four new models as rapid-rate temperature cycle type products, bringing the total lineup to 32 models across the series

Equipment Business: New Product Introduction 1

(Released in Feb. 2020)

Walk-In Type
Temperature (& Humidity) Chamber
for High-Power Series

Feature:

- Compliant with IEC International Standards and German Automotive industry standard LV124 (Can perform rapid temperature change testing at 3K/minute with the specimens inside.)
- •Low GWP coolant (R-449A) as standard equipment




Walk-In Type Temperature (& Humidity) Chamber for High-Power Series

■ Walk-In Type Temperature (& Humidity) Chamber for Drive-In Series

Features:

- •Closely recreates various weather environments in a large space of approximately 500 m³ accommodating two vehicles to perform actual vehicle testing
- •Multiple environmental factors can be recreated simultaneously, including temperature and humidity, sunlight, rain, snow, fog, and wind

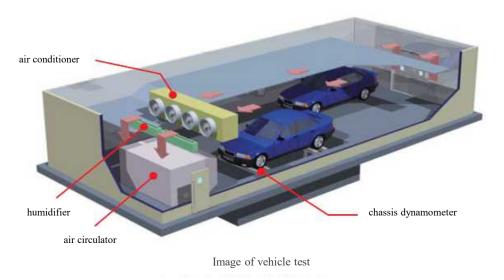

Walk-In Type Temperature (& Humidity) Chamber for Drive-In Series

Equipment Business: New Product Introduction 2

For the semiconductor field

(Released in Jan. 2024)

For the semiconductor field

(Released in Mar. 2023)

- Thermal Dependent Warpage Measurement System
- Visualize the warpage deformation of semiconductor packages and mounting substrates in a thermal environment.
- Providing the measurement services using the system as well.
- The system contributes to solving bonding defect issues in mounting substrates caused by increased power consumption or heat generation.

- Burn-In Chamber Support for High Heat Generation Load
- •Expanded the Burn-In Chamber which has permissible heat generation load by four times (compared to the Company's existing devices) under temperatures from 20° C to 150° C.
- •Enables precise temperature control even when semiconductors are in a state of high heat.
- •Inspection volumes increased significantly, contributes to shorter inspection times.



Thermal Dependent Warpage Measurement System

3D Measurement System

Temperature Controller

Temperature Chamber



Burn-In Chamber Support for High Heat Generation Load

Equipment Business: Examples of Products Delivered 1

(Delivered in Jul. 2018)

■ Walk-in Type Temperature (& Humidity) Chamber, for building materials

Uses:

Reproduce the environment inside apartments (temperature and humidity) and outdoors (weather such as rain, snow, and sunlight), conduct performance evaluations and durability tests of building materials for sash, balcony, etc.



Walk-in Type Temperature (& Humidity) Chambers, for use for building materials



Temperature (& Humidity) Chambers are movable so that building materials for testing can be easily changed



Furnished with irradiation equipment and watering (rain) equipment, to reproduce an outdoor weather environment

Equipment Business: Examples of Products Delivered 2

(Delivered in Mar. 2016)

Smart System Research Facility, Fukushima Renewable Energy Institute, AIST (Koriyama city, Fukushima)

Product delivered:

Large Walk-in Type Temperature & Humidity Chamber

Uses:

Performance and safety evaluation for large power conditioners for solar power generation Supports heat generation loads of 100 kw and large weights (21 tons)



Large Walk-in Type Temperature & Humidity Chamber

National Laboratory for advanced energy storage technologies (NLAB), National Institute of Technology and Evaluation (Nanko, Osaka City)

Product delivered:

- 1. Walk-in Type Temperature & Humidity Chamber for chargedischarge testing
- 2.External short-circuit testing equipment (energy devices equipment)

Uses:

- 1. Evaluate the performance of storage batteries by repeatedly charging and discharging them
- 2. Evaluate safety by confirming that storage batteries will not catch fire or rupture if they short circuit



Walk-in Type Temperature & Humidity Chamber for charge-discharge testing

12


Equipment Business: Usage Case with Energy Device Equipment

Charge-discharge Cycle Evaluation Equipment

Equipment for ensuring the reliability and safety of lithium-ion secondary batteries for next-generation vehicles (e.g., hybrid and electric vehicles)



Secondary Battery Charge-Discharge Evaluation System

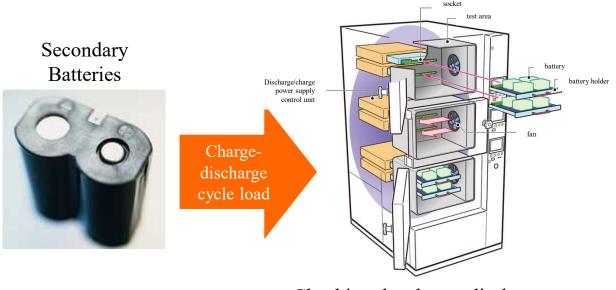

Checking the charge-discharge characteristics of secondary batteries

Evaluating the performance and life of secondary batteries


Equipment Business: Usage Case with Semiconductor Equipment

Screening

Eliminate defective products to maintain initial-period quality at the final inspection stage of semiconductor device manufacturing



Burn-In Chamber

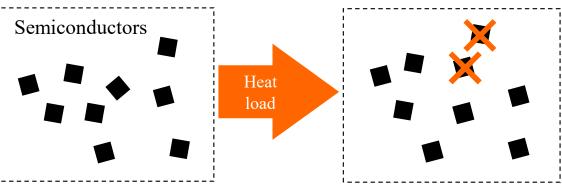

Elimination of latent early failures

Reliability Evaluation

Used to evaluate basic failure patterns to ensure reliability in the development of new technologies



Conductor Resistance Evaluation System



Example of defect in soldered joint

PCB

Solder crack

Electrical evaluation of reliability of joints in electronic parts

Service Business

After–Sales Service and Engineering

Preventive maintenance of products, maintenance service, and the upgrading/improvement and installation/relocation of products

- Speedy response via one of the most extensive networks in Japan
- Launching services by utilizing the network function mounted in the equipment

Laboratory Testing Services and Facility Rentals

Laboratory testing, analysis, and evaluation; consulting; equipment rental; sales of used products; calibration of test equipment, etc.

- The company has four laboratory testing centers in Japan, one in Thailand, two in China. (Japan: Utsunomiya, Toyota, Kariya and Kobe, Thailand, China: Shanghai, Suzhou)
- •The centers are also recognized as official calibration facilities under the Japan Calibration Service System (JCSS).
- First in world Opened Battery Safety Testing Center.(in Sep. 2015)
- Providing a one-stop service for testing and certification application services compliant with United Nations regulations on the safety of automotive secondary batteries.
- Entered into business alliance with TÜV SÜD Japan Ltd., a third-party certification agency (in Oct. 2014).



<Battery Safety Testing Center>
(within the Utsunomiya Technocomplex)


- Acquire ISO/IEC 17025* test facility certification in the three fields of automobiles, trains and airplanes.
- First in Japan The Toyota Test Center addressing all test items set forth by the LV124 German Automotive Manufacturer Testing Standards.
- * ISO/IEC 17025: An international standard in which an authoritative third-party organization certifies whether a test facility or calibration organization is capable of producing accurate measurements or calibration results.

Service Business: After–Sales Service

(Started in Apr. 2022)

"Network service" utilizing mobile communications and cloud computing.

Eases the burden on customers' tests and machinery management, and reduces equipment downtime.

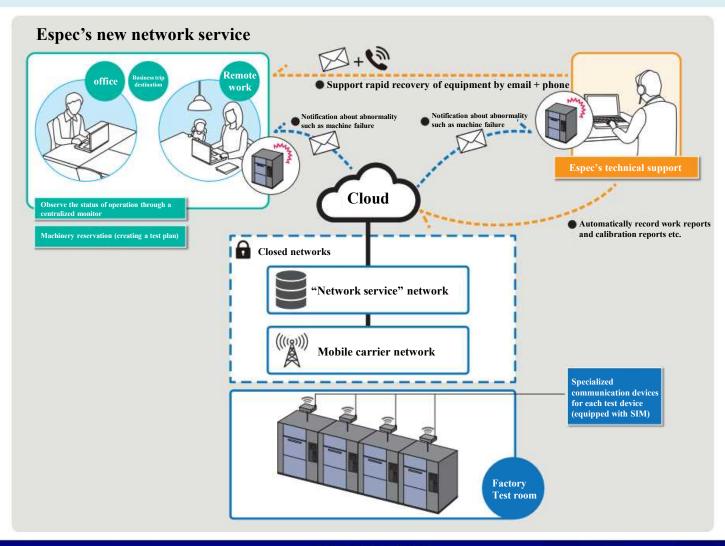

Service Business: Laboratory Testing Services

First Battery Safety Testing Center in the World Compliant with United Nations Regulations

- In September 2015, opened in Utsunomiya Technocomplex.
- Provide a one-stop service to support the implementation of 9 safety tests and applications for certification by agencies, as stipulated by UN ECE R100-2. Part II, a United Nations regulation.

- First Defect Analysis Service in Japan for Battery Packs and Modules Installed in Automobiles
- •In November 2022, launched an analysis service that identifies defective parts, dismantling packs and modules, then diagnosing them electronically and visually.
- •Provides analysis services as an impartial third-party organization, and helps to ensure the performance and safety of automotive rechargeable batteries.



Crush Testing Equipment (No. 1 Safety Test Room)



No. 2 Safety Test Room



Glovebox for dismantling cells

Service Business: Laboratory Testing Services

First Testing Facility in Japan Compatible with All German Automotive Manufacturer Testing Standards

- •In September 2019, Toyota Test Center became compatible with all test items set forth by the LV124 German Automotive Manufacturer Testing Standards.
- Support Japanese automotive equipment manufacturers seeking to develop global operations.

Toyota Test Center

First Commissioned Testing Service in Japan Powered 100% by Renewable Energies

- Since April 2021, commissioned testing services at five test centers across Japan (Utsunomiya, Toyota, Kariya, Kobe and the Battery Safety Testing Center) have been provided using renewable energies.
- •Contributing to the reduction of CO2 emissions in customers' supply chains.



Test reports from tests conducted at ESPEC's testing centers receive the Green Power logo to clearly indicate zero CO2 emissions during testing.

18

Other Business

Environmental Preservation

Reforestation (Tree planting)

Recovery of local forest by selecting species and planting out seedlings using potential natural vegetation data.

Waterfront biotope restoration

Reconstruction of natural environment, development of vegetative revetments, and water quality improvement using aquatic plants.

■ Urban greening

Provision of roof and wall greening systems that use moss to effectively alleviate heat island effect.









Plant Production Systems

Provision of various cultivation environments employing advanced environmental control technologies to control light, temperature, humidity, carbon dioxide, etc.



Plant factory



Phyto-toron

Other Business: Plant Production Systems

Joint Development with NARO Cultivation Environment Emulator

- •Obtained a patent jointly with the National Agriculture and Food Research Organization (NARO) and others in October 2022.
- Precisely reproduces seasonal carbon dioxide concentration, temperature, humidity, etc.
- Contributes to development of crop production technologies adapted to climate change.



Cultivation Environment Emulator

Produced a high value-added vegetables using deep sea water

• Production and sales of vegetables high in minerals with the use of deep sea water at a plant factory near Haneda Airport.





Interior of the plant factory and factory-produced vegetables "mineraleaf"

^{*} ESPEC MIC Corp. jointly obtained the patent with the National Agriculture and Food Research Organization (NARO), Riken and the Agri Open Innovation Institute.

Other Business: Examples of Products Delivered

Arid Land Research Center, Tottori University

(Delivered in Mar. 2016)

Products delivered:

Experimental System for Analyzing Responses of Dryland plants to Climate Changes (2 units) (Simulates the climates of arid lands, including high temperature, low humidity, strong sunlight, and high winds)

Uses:

Plant cultivation experiments and experiments to develop efficient water-usage technologies in arid lands, research to solve issues facing arid lands



Experimental System for Analyzing Responses of Dryland plants to Climate Changes



Experiment in progress (Testing wheat for drought stress)

Introduction to ESPEC's All Weather Simulation Chamber (in the Kobe R&D Center)

(Mar. 2021)

Opened the world's first All Weather Simulation Chamber Encouraging open innovation and strengthening environmental creation technology

Replicates dynamic climate environments with high-precision control and variation of seven environmental factors (temperature, humidity, snow, fog, rain, sunlight and wind)

- All Weather Simulation Chamber
- Examples of tests in dynamic environments





(1)Tests to replicate the change from sleet to snow

Snow with different amounts of water content can be replicated, including snowfall at temperatures around 0°C, which is close to snowfall in a natural environment. By controlling the snow quality and temperature, the laboratory replicates the change from sleet to snow. The laboratory can confirm the performance of automated driving sensors for which snow accretion has become a problem.



Test chamber: Width 6 m x Depth 9 m x Height 3 m A black coating is applied to suppress the diffuse reflection of light.



(2)Experiment to replicate the change from rain to fog

The laboratory controls the thickness, temperature and humidity of fog and replicates the change from rain to fog. The laboratory can confirm the performance of automated driving sensors in response to the effects of fog.

INQUIRIES:

ESPEC CORP.

3-5-6, Tenjinbashi, Kita-ku, Osaka 530-8550, Japan

E-mail: ir-div@espec.jp

Sustainability Management Department

Yasutoshi Nakagawa (General Manager),

IR & Public Relations Group

Natsuko Okawa and Hana Kaigawa

ESPEC CORP. 2.